

GOVERNMENT TENDER NOTICE

Notice Inviting Tender Nos.89,90,91,92,93 & 94/SERI/PCR/Nadia/2017-18.

Sealed quotations are invited by the **Executive Engineer**, Directorate of Textiles(Sericulture), West Bengal, 45, Ganesh Chandra Avenue (2nd floor), Kolkata-13 for Constructional works in Nadia district from the enlisted contractors of P.W. Deptt. (Elec.), CB Directorate, as well as from the bonafide experienced and resourceful outside contractors having experience in such type of works in Govt. Department / Zilla Parishad.

NIT No.	Name of the Work.	Estimated Cost	Earnest Money	Place of Work.	Time of completion of work.
89	Repairing of Doors & window of Rearing House No.1 & 2 with over-head Tank on Security Qtr. including water supply arrangement at Karimpore Sericulture Complex. Nadia under P.C.R.	Rs.3,00,396/- (Rupees three lakh three hundred ninety six) only.	Rs.7,510/- (Rupees seven thousand five hundred ten)	Karimpore Sericulture Complex. Nadia	1(one) month from the date of issue of Work Order.
90	Repairing of Roof of old Pump House including allied works at Ranaghat Sericulture Complex, Nadia under P.C.R.	Rs.1,62,948/- (Rupees one lakh sixty two thousand nine hundred forty eight) only	Rs.4,075/- (Rupees four thousand seventy five) only	Ranaghat Sericulture Complex. Nadia.	-do-
91	Repairing of doors & window of Reeling House Nos.1 & 2 with pucca plat form at Shibnibas Sericulture Farm. under P.C.R.	Rs.4,74,818/- Rupees four lakh seventy four thousand eight hundred eighteen) only.	Rs.11,890/- (Rupees eleven thousand eight hundred ninety) only.	Shibnibas Sericulture Farm. Nadia.	-do-
92	Repairing of 2(two) Nos. Gr.-'D' Qtrs. and 1(one) No. Demonstrators Qtr. with connecting road at Shibnibas Sericulture Farm. Nadia under P.C.R.	Rs.4,25,042/- (Rupees four lakh twenty five thousand forty two) only	Rs.10,626/- (Rupees ten thousand six hundred twenty six) only.	-do-	-do-
93	Renovation & Re-arrangement of inside Office Building of the Deputy Director of Textiles(Seri). Krishnagar Nadia under P.C.R.	Rs.4,98,614/- (Rupees four lakh ninety eight thousand six hundred fourteen) only.	Rs.12,465/- (Rupees twelve thousand four hundred sixty five) only.	O/o, the Deputy Director, Textiles (Seri). Krishnagar Nadia.	-do-
94	Post construction of Anti-termite treatment for Office Building of the Deputy Director of Textiles(Seri). Krishnagar Nadia under P.C.R.	Rs.89,194/- (Rupees eighty nine thousand one hundred ninety four) only.	Rs.2,230/- (Rupees two thousand two hundred thirty) only.	-do-	-do-

The quotation Papers (N.I.T., Schedule of Works, & Form : 2911(i/ii) etc.) may be obtained/downloaded from seriwb.gov.org at free of cost. Duly filled quotation to be submitted/dropped in the Box kept at Head Quarters, Kolkata and papers should be arranged in the following manner.

Envelope - I, should be superscribed as Technical Bid for N.I.T. No....., Sl.No. of Work. Name of the Agency and it should contain copy of Self Attested i) PAN Card. (ii) Last I.T. Return. (AY 2016-17) (iii) GST IN Registration Certificate which is valid for the current period, (iv) Professional Tax Clearance and Challan for the last financial year. (v) Credential for Similar nature of work at about 60% of Tender value). the **Pesticide License** is required for NIT No.94 and E.M.D. Sealed.

Envelope - II, should be super scribed as Financial Bid for N.I.T.No....., Sl.No. of Work, Name of Agency and should contain filed on 2911 (ii) quoting in Rate both in figure and words, and Sealed.

2(two) Envelopes as noted above (I & II) should be put in a bigger Envelope and sealed. Agency should write clearly N.I.T. No..... Name of Work, SL. No. and Name of Agency on this Envelope and drop the same as per scheduled mentioned in this N.I.T.

Last date and time of submission of Tender	21-03-2018 at 3-00 P.M. at Headquarters, Kolkata.
Date of opening of Tender	21.03.2018 after 3-30 P.M. at Headquarters, Kolkata.


Technical Bid will be opened first. Financial Bid will be opened only if the Technical Bid is found acceptable.

Labour Cess will be deducted from Bill value as per Govt. Rules. All original copies are to be shown for verification. The details may be seen in the Office of the **Commissioner of Textiles (Sericulture), West Bengal** 45, Ganesh Ch. Avenue (2nd floor), Kolkata - 700 013 on any working days and in website : seriwb.gov.org.

N.S.C./K.V.P. will not be accepted as Earnest Money. Only the Demand Draft / Bankers Cheque of a Nationalized Bank will be considered.

The Commissioner of Textiles (Sericulture), West Bengal reserves the right to reject/accept all the applications without showing any reasons thereof. If any date as above happens to be holiday the next working day will be considered as stipulated date. Acceptance of lowest Tender is not obligatory.

Notwithstanding anything contained in this N.I.T., the general and other terms and conditions will be binding upon all concerned.

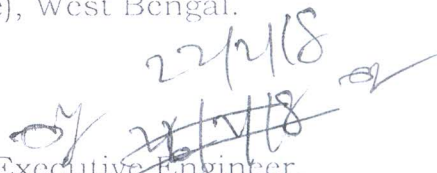

Executive Engineer,
Directorate of Textiles(Sericulture),
West Bengal.

Memo.No: 4057(3)/ENG/CIVIL/PCR/3 (Vol.-4),

Dated, 22/02/2018.

Copy forwarded for information & necessary action to :-

1. The Deputy Director of Textiles (Sericulture),
Krishnagar, Nadia.
2. The Notice Board of this Directorate, Headquarters, Kolkata.
3. The Website of this Directorate of Textiles (Sericulture), West Bengal.


Executive Engineer,
Directorate of Textiles (Sericulture),
West Bengal.

**Priced Schedule for post construction anti-termite treatment for the office building of Dy.
Director of Textiles (Sericulture), Krishnagar, Nadia under P.C.R.**

Sl.No.	Description of item.	Unit	Quantity	Rate (Rs.)	Amount(Rs.)
1.0	Anti-termite treatment to the outside of foundation with chemical emulsion by admixing chloropyrofos emulsifiable concentrate (1% concentration) with water by weight, drilling 12mm. dia holes in concrete or masonry apron at an interval of 300mm. to a depth, of 300mm or more as close to the plinth wall as possible and the chemical emulsion pumped into those holes to soak the soil below at a rate of 2.25 litres per linear metre complete as per specification laid down in para 4.3.1.1 of Code I.S.- 6313 (Part-III)-1981.	Mtr.	60.00	83.00	4980.00
2.0	Anti-termite treatment to the soil under floor with chemical emulsion by admixing chloropyrofos emulsifiable concentrate (1% concentration) with water by weight including drilling vertically 12mm. dia holes at the junction of floor and wall at 300mm. interval to reach the soil below using hand operated pressure pump to squirt chemical emulsion into the pump to squirt chemical emulsion into the holes at the rate of one litre per hole. The holes shall be sealed after operation to match with the existing floor. The entire work is to be carried out as per specification laid down in para 4.3.1.4 of code I.S.-6313 (Part-III)-1981.	Sq.m	148.00	93.00	13764.00
3.0	Anti-termite treatment to the junction of wood work and masonry walls with chemical emulsion by admixing chloropyrofos emulsifiable concentrates (1% concentration) with water by weight including spraying at the points of contact with the adjoining masonry by drilling 6m. dia holes at a downward angle of about 45 degree at the junction of woodwork and masonry and squirting chemical emulsion into these holes at the rate of half litre per hole. The entire work is to be carried out as per specification of Code I.S.-6313 (Part-III)-1981. The shutters are to be sprayed with emulsion. on both sides. All wooden fixtures like almirahs, racks etc. are also to be thoroughly sprayed with chemical emulsion. (Payment will be made on the basis of outside measurements of doors and windows	Sq.m	72.00	61.00	4392.00
4.0	Spot application for insecticides using Aqua basespray for pest (for bugs, cockroaches, silverfish, spider, termites, mosquitoes) to walls and ceiling etc. with chemical emulsion by admixing chloropyrofos emulsifiable concentrates (1% concentration) with water by weight including spraying the emulsified chemical @ 0.5 litres per sq.m. by a hand operated pressure pump on wall surfaces, ceiling, electrical fixture, electrical lines including drilling holes in places where source of termite is detected squirting chemical solution into the holes and sealing the holes with cement grout. (Rate is per sq.m. of the floor area while actual work will be all walls ceiling, rack, partition and furniture).	Sq.m	1137.00	49.00	55713.00

Total= Rs 78,849.00

Add G.S.T.@ 12%(CGST 6% + SGST 6%) + Rs. 9,462.00

Total= Rs.88, 311.00

Add labour welfare cess @1% (+) Rs. 883.00

Total= Rs. 89,194.00


Executive Engineer
Directorate of Textiles (Sericulture),
Government of West Bengal